



PFR140 120 80 60

Features

- Microprocessor based intelligent auto switching control
- Automatic C/K and rated step adjustment
- Automatic CT polarity correction
- Display of power factor, current & total harmonic distortion of current
- Programmable sensitivity
- Last step can be used as alarm/fan output
- Under/over voltage alarm, under/over compensation alarm & high harmonic distortion alarm
- User-friendly setting
- Complies with IEC 61000-6-2 standard

Technical Data

RATINGS AUXILIARY POWER SUPPLY

Current Supply voltage : 200~240 V AC /
380~415 V AC
Operating Limits : -15% + 10%
Consumption : 10 VA max
Rated frequency : 50 Hz or 60 Hz

OUTPUT CONTACTS

Numbers of outputs : 6 / 8 / 12 / 14 (PFR60
/ PFR80 / PFR120 /
PFR140)
Rated voltage : 250 V AC
Contact rating : 5 A
Expected electrical life : 100,000 operations at
rated current
Expected mechanical life : 5 x 10⁶ operations
Max current for the
common terminals : 12 A continuous

CURRENT INPUT

Rated current (In) : 5 A
Operating Limits : 0.05 A to 6.5 A
Rated Frequency : 50 Hz or 60 Hz

CONTROL RANGE

Power factor setting : 0.8 Ind - 0.8 Cap
C/K setting : 0.03 - 1.20 / Automatic
Switching sensitivity : 5 - 600 s/step
Reconnection time for
same step : 5 - 240 s
THD threshold : 0.20 - 3.00 (20% - 300%) /
OFF
Switching Program : Automatic / Automatic
Rotate / 4-quadrant /
Manual
Rated step coefficient : 0 / 1 / 2 / 3 / 4 / 5 / 6 / 8 /
12 / 16
(Automatic if C/K set to
Auto)


ENVIRONMENTAL CONDITIONS

Temperature : -5°C to +55°C
Humidity : 56 days at 93% RH and
40°C non-condensing

MECHANICAL

Mounting : Panel mounting
Dimension (mm) : 144(w) x 144(h) x 90(d)
Enclosure protection : IP54 at the panel
Approximate weight : 1.2 kg

Typical Application Diagram

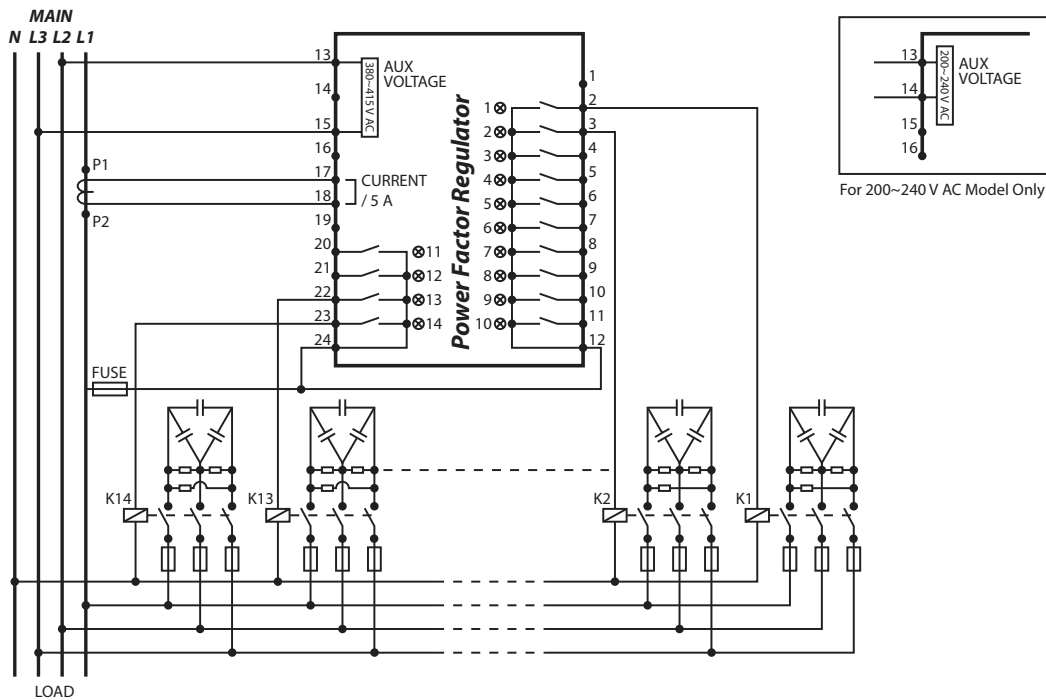

Ordering Information

MODEL

DESCRIPTION

PFR60 - 415 - 50	6 Steps, 50 Hz system, auxiliary voltage 380~415 V AC
PFR80 - 415 - 50	8 Steps, 50 Hz system, auxiliary voltage 380~415 V AC
PFR120 - 415 - 50	12 Steps, 50 Hz system, auxiliary voltage 380~415 V AC
PFR140 - 415 - 50	14 Steps, 50 Hz system, auxiliary voltage 380~415 V AC
PFR60 - 220 - 50	6 Steps, 50 Hz system, auxiliary voltage 200~240 V AC
PFR80 - 220 - 50	8 Steps, 50 Hz system, auxiliary voltage 200~240 V AC
PFR120 - 220 - 50	12 Steps, 50 Hz system, auxiliary voltage 200~240 V AC
PFR140 - 220 - 50	14 Steps, 50 Hz system, auxiliary voltage 200~240 V AC
PFR60 - 415 - 60	6 Steps, 60 Hz system, auxiliary voltage 380~415 V AC
PFR80 - 415 - 60	8 Steps, 60 Hz system, auxiliary voltage 380~415 V AC
PFR120 - 415 - 60	12 Steps, 60 Hz system, auxiliary voltage 380~415 V AC
PFR140 - 415 - 60	14 Steps, 60 Hz system, auxiliary voltage 380~415 V AC
PFR60 - 220 - 60	6 Steps, 60 Hz system, auxiliary voltage 200~240 V AC
PFR80 - 220 - 60	8 Steps, 60 Hz system, auxiliary voltage 200~240 V AC
PFR120 - 220 - 60	12 Steps, 60 Hz system, auxiliary voltage 200~240 V AC
PFR140 - 220 - 60	14 Steps, 60 Hz system, auxiliary voltage 200~240 V AC

Case Dimensions

