

ATyS C55

ATS Controller

Smart functions



ATyS C55

Functions

ATyS C55 is a complete ATSE controller that can be used to pilot a remotely operated transfer switch of any technology: motorised switches (e.g. ATyS r, ATyS S or ATyS d M), circuit breakers or contactors. ATyS C55 ensure the automatic or remotely controlled transfer from one source to another, with configurable timers and thresholds, for any combination of sources: 2 transformers, or 1 transformer and 1 or 2 gensets.

Advantages

Fast commissioning

On initial power up, the ATyS C55's smart wizard will guide the operator through the commissioning process.

Versatile

The ATyS C55 is compatible with contactors, breakers and switches. It can also work for all type of 2-source applications combining mains and gensets.

Clear visualisation and operation

- High-resolution LCD screen with clear defined messages.
- Real-time pop-ups to show timers, alarms, faults and information alerts.
- Quick and easy access to main functions through the front face with direct key input.
- Complete configuration can be achieved through the front face or via software (Easy Config).

General characteristics

- Self-powered from voltage sensing.
- Wide voltage range (88-576 VAC).
- 24 VDC aux power supply (for optional use).
- 2 latching relays.
- Smart commissioning wizard.
- IP65 Ingress Protection rating with gasket (accessory).
- 1000 alarms and events.
- 6 fully configurable I/O.
- Genset scheduler.
- Door or back plate mounting.
- Mains/Mains, Mains/Genset and Genset/Genset applications.
- Easy Config System configuration software.
- RS485 Modbus communication.
- Ethernet, SNMP, BACnet using DIRIS M-70 gateways. Includes Web server.
- A DIRIS Digiware D-70 gateway can be utilised as a remote display for multiple ATyS C55/C65 controllers; the D-70 also provides Ethernet, SNMP & BACnet connectivity.

The solution for

- > Commercial buildings
- > Applications:
 - Genset/Genset
 - Mains/Genset
 - Mains/Mains
 - External/portable systems



Strong points

- > Smart commissioning
- > Intuitive use
- > High-resolution LCD display

Conformity to standards

- > IEC 61010-2-201
- > IEC 60947-6-1
- > GB/T 14048.11 Annex C



Communication gateways



DIRIS Digiware M-70 and D-70

Compatible with

ATyS r
Transfer
switchesDual power supply
Optional for use with ATyS
r, breakers and contactors
without integrated DPS


References

Description	Reference
ATyS C55 – ATS controller (includes mounting kits)	1600 0055
IP65 gasket for door cut-out ⁽¹⁾	1609 0001
DIRIS Digiware M-50 multi-protocol Ethernet gateway	4829 0221
DIRIS Digiware D-50 multipoint display, Ethernet output	4829 0204
DIRIS Digiware M-70 communication gateway for Ethernet & Web server	4829 0222
DIRIS Digiware M-70 communication gateway for Ethernet & Web server and multi-product display	4829 0203
Dual power supply - DPS	1599 4001
ATyS r - Remotely operated transfer switches	9523 xxxx ⁽²⁾


(1) The gasket provides an IP65 seal between the controller and the panel door; the front face (display & keys) is IP65 as standard.

(2) xxxx depends on number of poles and rating

Front panel

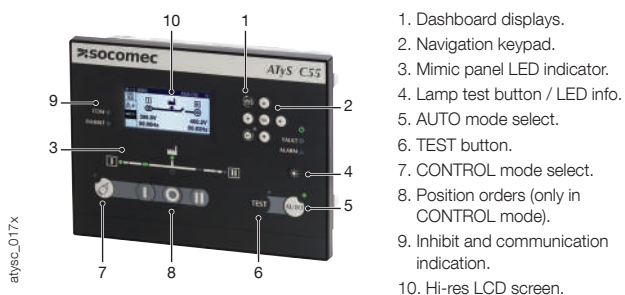

Dimensions (mm)

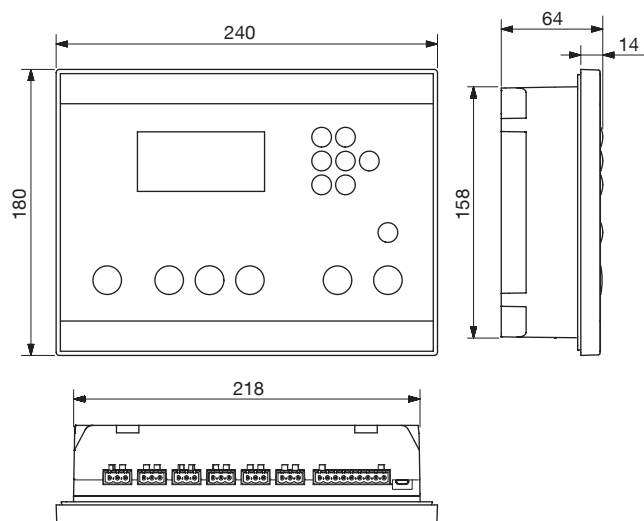

Characteristics

Electrical characteristics

AC operating limits	110 - 480 V AC $\pm 20\%$
Optional DC supply	24 V DC
Frequency limits	45 - 65 Hz
Power consumption	< 10 W
Inputs	6, fully programmable
Outputs	6, fully programmable
Output relay	8 A AC 15
EMC classification	Class A and B
Impulse withstand	8/6 kV ⁽¹⁾
Overvoltage category	CAT 3

⁽¹⁾ 8 kV tested between phases of a different source and 6 kV tested between phases of the same source.

Mechanical characteristics

Weight	1080 g
Door cutout	220 x 160 mm
Ingress Protection rating	IP65 with optional gasket
Operating temperature	-30 to +70°C


Communications

Interface type	RS485. 2 to 3 half duplex wires
Protocol	MODBUS RTU
Baud rate	programmable 1200 - 115200 bps

Display

Screen resolution	350 x 160 pixels
Event recorder	1000 events

Terminals

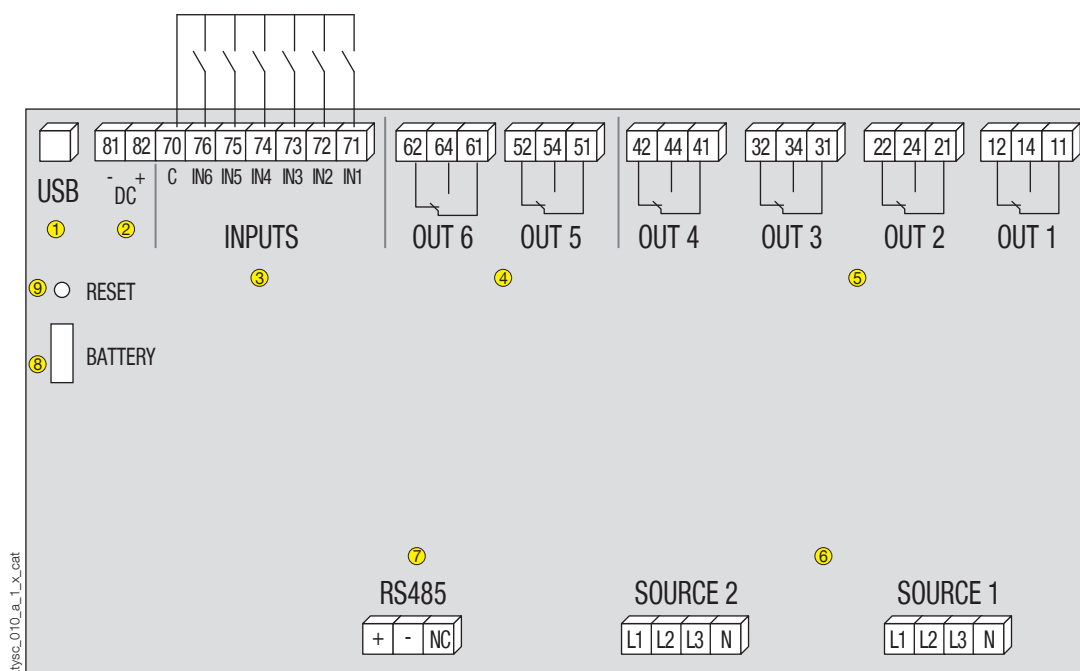

1. USB configuration
2. 24 VDC aux power supply (for optional use)
3. 6 x inputs
4. 2 x latching relay outputs
5. 4 x relay outputs
6. Source sensing (110 - 480 $\pm 20\%$)
7. RS485 communication
8. Replaceable RTC battery
9. Hard reset button